





Ninety degree CAVITY: T-2A



snhy.com/BCW



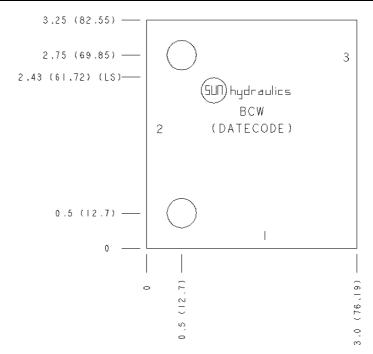

TECHNICAL DATA

| Body Type | Line mount | |
|------------------------|---------------|--|
| Interface | None | |
| Body Features | Ninety degree | |
| Mounting Hole Diameter | 10,7 mm | |
| Mounting Hole Depth | Through | |
| Mounting Hole Quantity | 2 | |
| Open Cavities | 1 | |
| Cavity | T-2A | |
| Port Size | 3/4" BSPP | |
| Model Weight | 0.48 kg. | |

NOTES

Important: Carefully consider the maximum system pressure. The pressure rating of the manifold is dependent on the manifold material, with the port type/size a secondary consideration. Manifolds constructed of aluminum are not rated for pressures higher than 3000 psi (210 bar), regardless of the port type/size specified.

PORT DESIGNATORS

| Modifiers | Ports |
|-----------|--|
| BCW, /S | Ports 1 & 2: 3/4" BSPP; Port 3: 1/4" BSPP; |

CONFIGURATION OPTIONS Model Code Example: BCW

MODIFIER

6061-T651 Aluminum, Buna-N

/S 65-45-12 Ductile Iron, Buna-N, Blackened

MANIFOLD FACES

FACE GRID

| 1 | 2 | 3 | 4 |
|---|----|----|----|
| 5 | 6 | 7 | 8 |
| 9 | 10 | 11 | 12 |

