

FHM series

Maximum working pressure up to 32 MPa (320 bar) - Flow rate up to 450 l/min



High Pressure filters

Manifold

Maximum working pressure up to 32 MPa (320 bar)

Flow rate up to 450 l/min

FHM is a range of high pressure filter for protection of sensitive components in high pressure hydraulic systems in the mobile machines. They are directly connected to the top of the manifold, through the proper flanged interface.

Available features:

Available features:

- Manifold connections up to Ø30 mm, for a maximum flow rate of 450 l/min
- ISO 4401 CETOP 3 and CETOP 5 interface, for direct mounting on the CETOP valves
- Fine filtration rating, to get a good cleanliness level into the system
- Bypass valve, to relieve excessive pressure drop across the filter media
- Check valve, to protect the system against reverse flow
- Low collapse filter element "N", for use with filters provided with bypass valve
- High collapse filter element "H", for use with filters not provided with bypass valve
- High collapse filter element with external support "S", for filter element protection against the back pressure caused by the check valve in filters not provided with the bypass valve
- Visual, electrical and electronic differential clogging indicators

Common applications:

Delivery lines, in any high pressure industrial equipment

Filter housing materials

- Head
Phosphatized cast iron: FHM 006-007-010
Phosphatized steel: FHM 050-065-135-320-500
- Housing: Phosphatized steel
- Bypass valve: Steel
- Check valve: Steel

Pressure

- Test pressure: 48 MPa (480 bar)
- Burst pressure: 96 MPa (960 bar)
- Pulse pressure fatigue test: 1 000 000 cycles with pressure from 0 to 32 MPa (320 bar)

Bypass valve

- Opening pressure 600 kPa (6 bar) ±10%
- Other opening pressures on request.

Δp element type

- Microfibre filter elements - series N: 20 bar
(not available for FHM 006, FHM 007 and FHM 010)
- Microfibre filter elements - series H: 210 bar
(not available for FHM 050 and FHM 500)
- Microfibre filter elements - series S: 210 bar
(only for FHM 050 and FHM 500)
- Wire mesh filter elements - series H: 210 bar
(only for FHM 006, FHM 007 and FHM 010)
- Fluid flow through the filter element from OUT to IN

Seals

- Standard NBR series A
- Optional FPM series V

Temperature

From -25 °C to +110 °C

Connections

Manifold mounting

Note







FHM filters are provided for vertical mounting






Weights [kg] and volumes [dm³]

Filter series	Weights [kg]					Volumes [dm³]						
	Length	1	2	3	4	5	Length	1	2	3	4	5
FHM 006		2.17	-	-	-	-		0.12	-	-	-	-
FHM 007		-	4.74	5.95	-	-		-	0.30	0.50	-	-
FHM 010		-	4.74	5.95	-	-		-	0.30	0.50	-	-
FHM 050		5.31	5.68	6.09	6.56	7.74		0.29	0.38	0.48	0.60	0.89
FHM 065		5.47	5.83	7.04	-	-		0.27	0.34	0.56	-	-
FHM 135		8.78	10.38	11.43	-	-		0.49	0.82	1.03	-	-
FHM 320		19.80	21.93	24.22	26.70	-		1.04	1.76	2.53	3.36	-
FHM 500		35.00	39.17	42.69	54.70	60.50		1.63	2.35	2.96	5.11	6.44

Filter housings Δp pressure drop

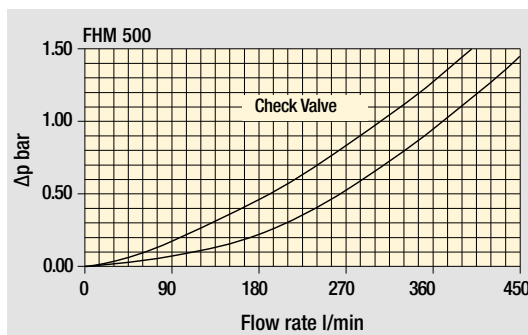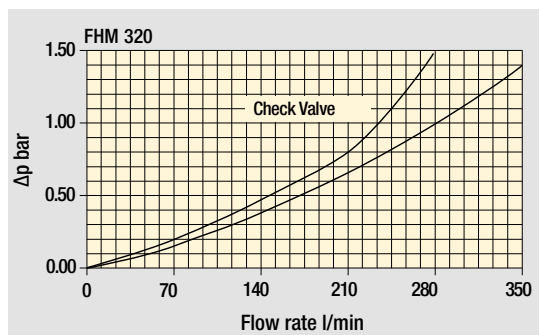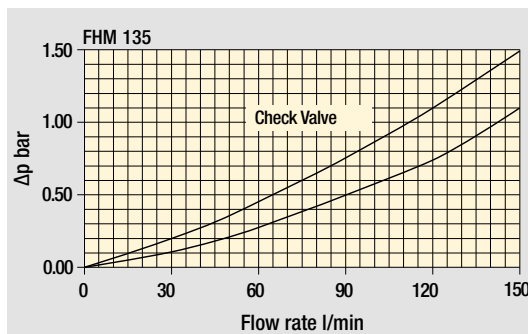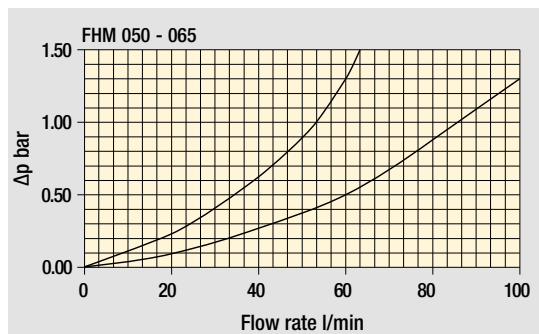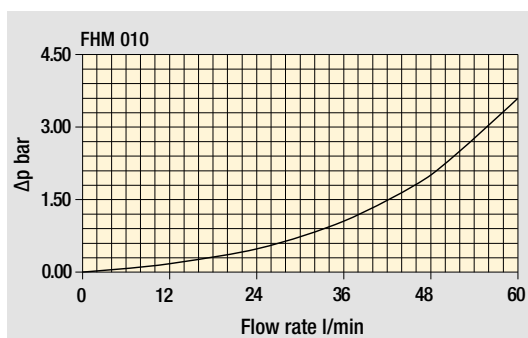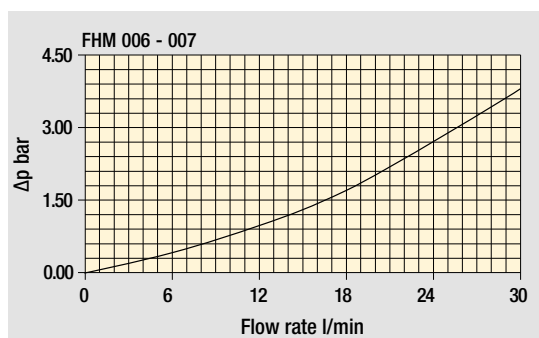

Bypass valve pressure drop

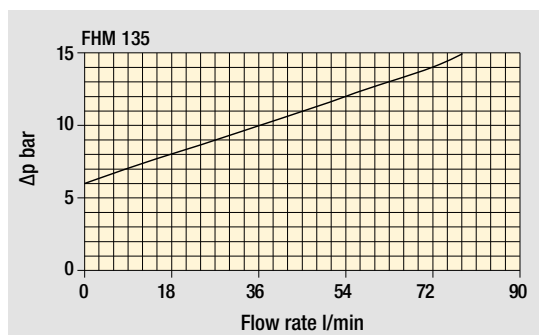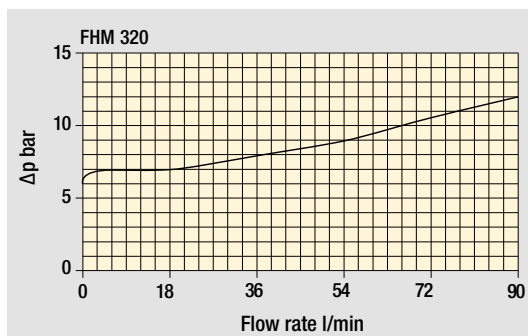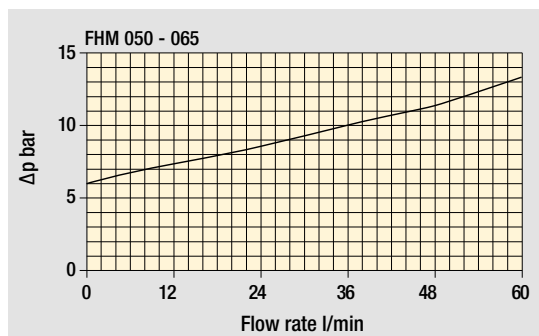

The curves are plotted using mineral oil with density of 0.86 kg/dm^3 in compliance with ISO 3968.
 Δp varies proportionally with density.

FHM GENERAL INFORMATION

Flow rates [l/min]

		Filter element design - H Series					
Filter series	Length	A03	A06	A10	A16	A25	M25
FHM 006	1	9	10	13	14	15	16
FHM 007	2	13	13	15	16	16	16
	3	15	15	16	16	17	17
FHM 010	2	23	25	32	34	37	38
	3	31	33	37	38	39	40

		Filter element design - N Series						Filter element design - S Series				
Filter series	Length	A03	A06	A10	A16	A25	M25	A03	A06	A10	A16	A25
FHM 050	1	38	37	65	67	81	101	28	36	50	52	62
	2	46	50	69	75	89	102	41	44	63	71	85
	3	57	59	76	81	93	103	51	53	71	77	90
	4	68	71	84	86	95	103	62	66	81	82	93
	5	82	83	93	95	98	105	73	75	83	89	97

		Filter element design - N Series						Filter element design - H Series				
Filter series	Length	A03	A06	A10	A16	A25	M25	A03	A06	A10	A16	A25
FHM 065	1	23	30	48	53	71	102	22	23	43	50	67
	2	30	45	59	64	81	103	30	34	56	62	76
	3	52	60	78	82	92	105	51	58	77	81	91
FHM 135	1	61	65	99	104	131	149	46	51	83	86	122
	2	91	96	118	119	155	167	79	92	109	111	134
	3	118	119	144	146	156	168	103	112	130	137	146
FHM 320	1	112	121	187	217	252	312	97	102	156	162	228
	2	200	214	281	293	320	328	161	181	237	241	282
	3	245	267	312	320	325	333	207	233	275	280	306
	4	267	281	315	325	336	341	232	247	279	283	309

		Filter element design - N Series						Filter element design - S Series				
Filter series	Length	A03	A06	A10	A16	A25	M25	A03	A06	A10	A16	A25
FHM 500	1	211	232	281	289	309	394	126	135	208	210	261
	2	242	262	303	308	330	397	187	206	258	266	285
	3	284	294	336	338	357	399	226	230	285	290	315
	4	302	325	346	350	361	401	251	273	314	315	341
	5	325	334	356	361	373	401	296	301	335	338	360

Maximum flow rate for a complete pressure filter with a pressure drop $\Delta p = 1.5$ bar.

The reference fluid has a kinematic viscosity of 30 mm²/s (cSt) and a density of 0.86 kg/dm³.

For different pressure drop or fluid viscosity we recommend to use our selection software available on www.mpfiltri.com.

Please, contact our Sales Department for further additional information.

Hydraulic symbols

Filter series	Style S	Style B	Style T	Style D
FHM 006	•			
FHM 007	•			
FHM 010	•			
FHM 050	•	•	•	•
FHM 065	•	•	•	•
FHM 135	•	•	•	•
FHM 320	•	•	•	•
FHM 500	•	•	•	•

OUT
IN

OUT
IN

OUT
IN

OUT
IN

Designation & Ordering code

COMPLETE FILTER

Series and size				Configuration example:							
				FHM010	2	S	V	G1	A03	H	P01
FHM006		FHM007		FHM010							
Length	FHM006	FHM007	FHM010								
1	•										
2		•	•								
3		•	•								
Valves											
S Without bypass											
Seals											
A NBR											
V FPM											
Connections											
G1 Manifold side "A"											
G2 Manifold side "B"											
Filtration rating (filter media)											
A03 Inorganic microfiber 3 µm		A16 Inorganic microfiber 16 µm									
A06 Inorganic microfiber 6 µm		A25 Inorganic microfiber 25 µm									
A10 Inorganic microfiber 10 µm		M25 Wire mesh 25 µm									
				Element Δp				Execution			
				H 210 bar				P01 MP Filtri standard			
								Pxx Customized			

FILTER ELEMENT

Configuration example: **HP065**

Element series and size

	FHM006	FHM007	FHM010
HP011	•		
HP065		•	•
HP100			
HP150			

Element length

	FHM006	FHM007	FHM010
2	•	•	•
3	•	•	•
4			

Filtration rating (filter media)

A03 Inorganic microfiber	3 μm	A16 Inorganic microfiber	16 μm
A06 Inorganic microfiber	6 μm	A25 Inorganic microfiber	25 μm
A10 Inorganic microfiber	10 μm	M25 Wire mesh	25 μm

Seals

A	NBR
V	FPM

Element Δp

H	210 bar
----------	---------

Execution



P01	MP Filtri standard
Pxx	Customized

ACCESSORIES

Differential indicators		page			page
DEA	Electrical differential indicator	563	DLE	Electrical / visual differential indicator	566
DEH	Hazardous area electronic differential indicator	563-564	DTA	Electronic differential indicator	567
DEM	Electrical differential indicator	564-565	DVA	Visual differential indicator	567
DLA	Electrical / visual differential indicator	565-566	DVM	Visual differential indicator	567
Additional features		page			
T2	Plug	568			

FHM006


Connection G1

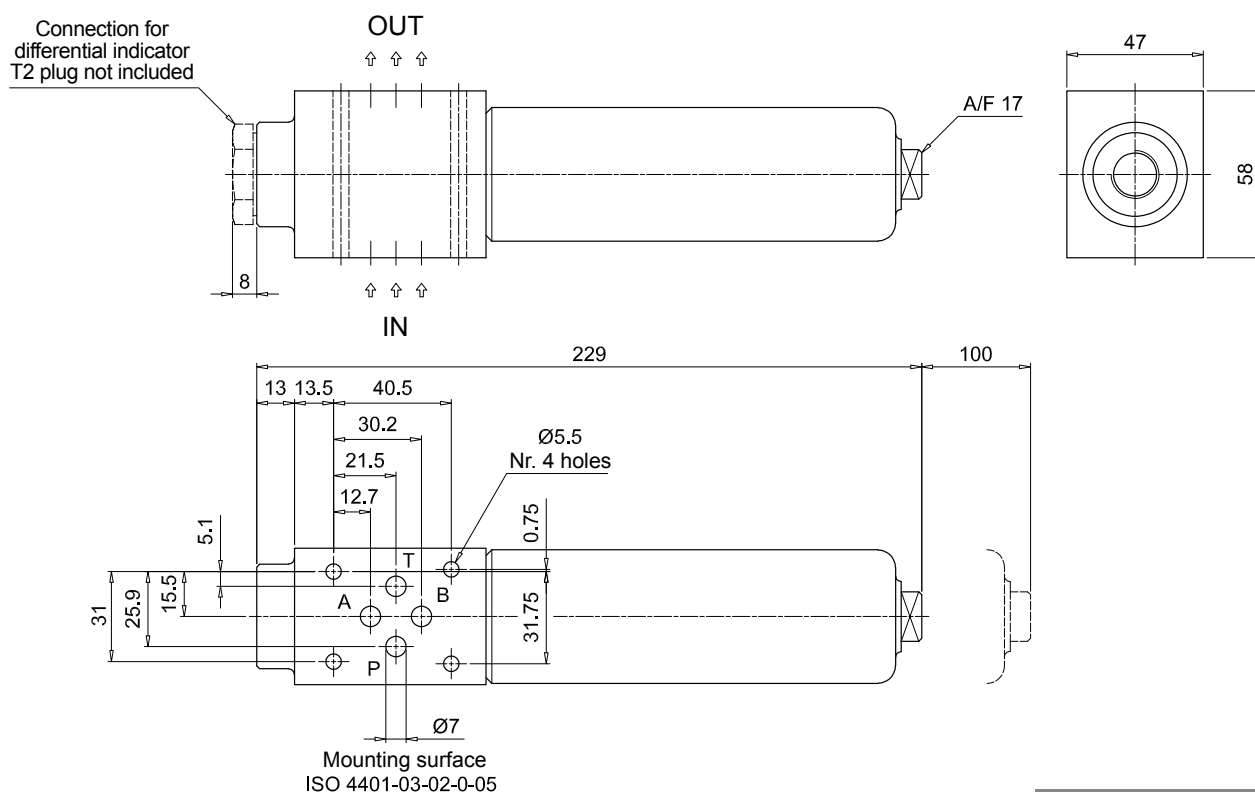
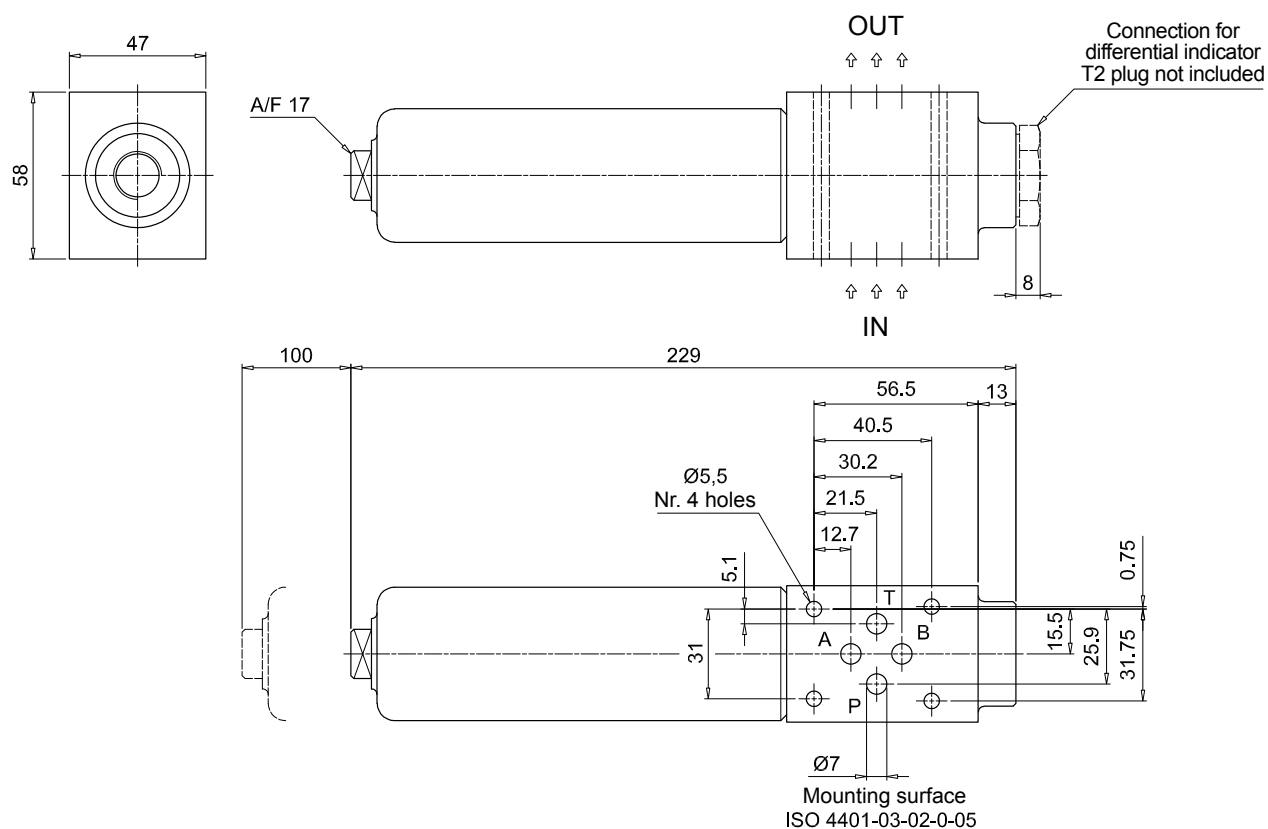


FHM006

Connection G2

Dimensions

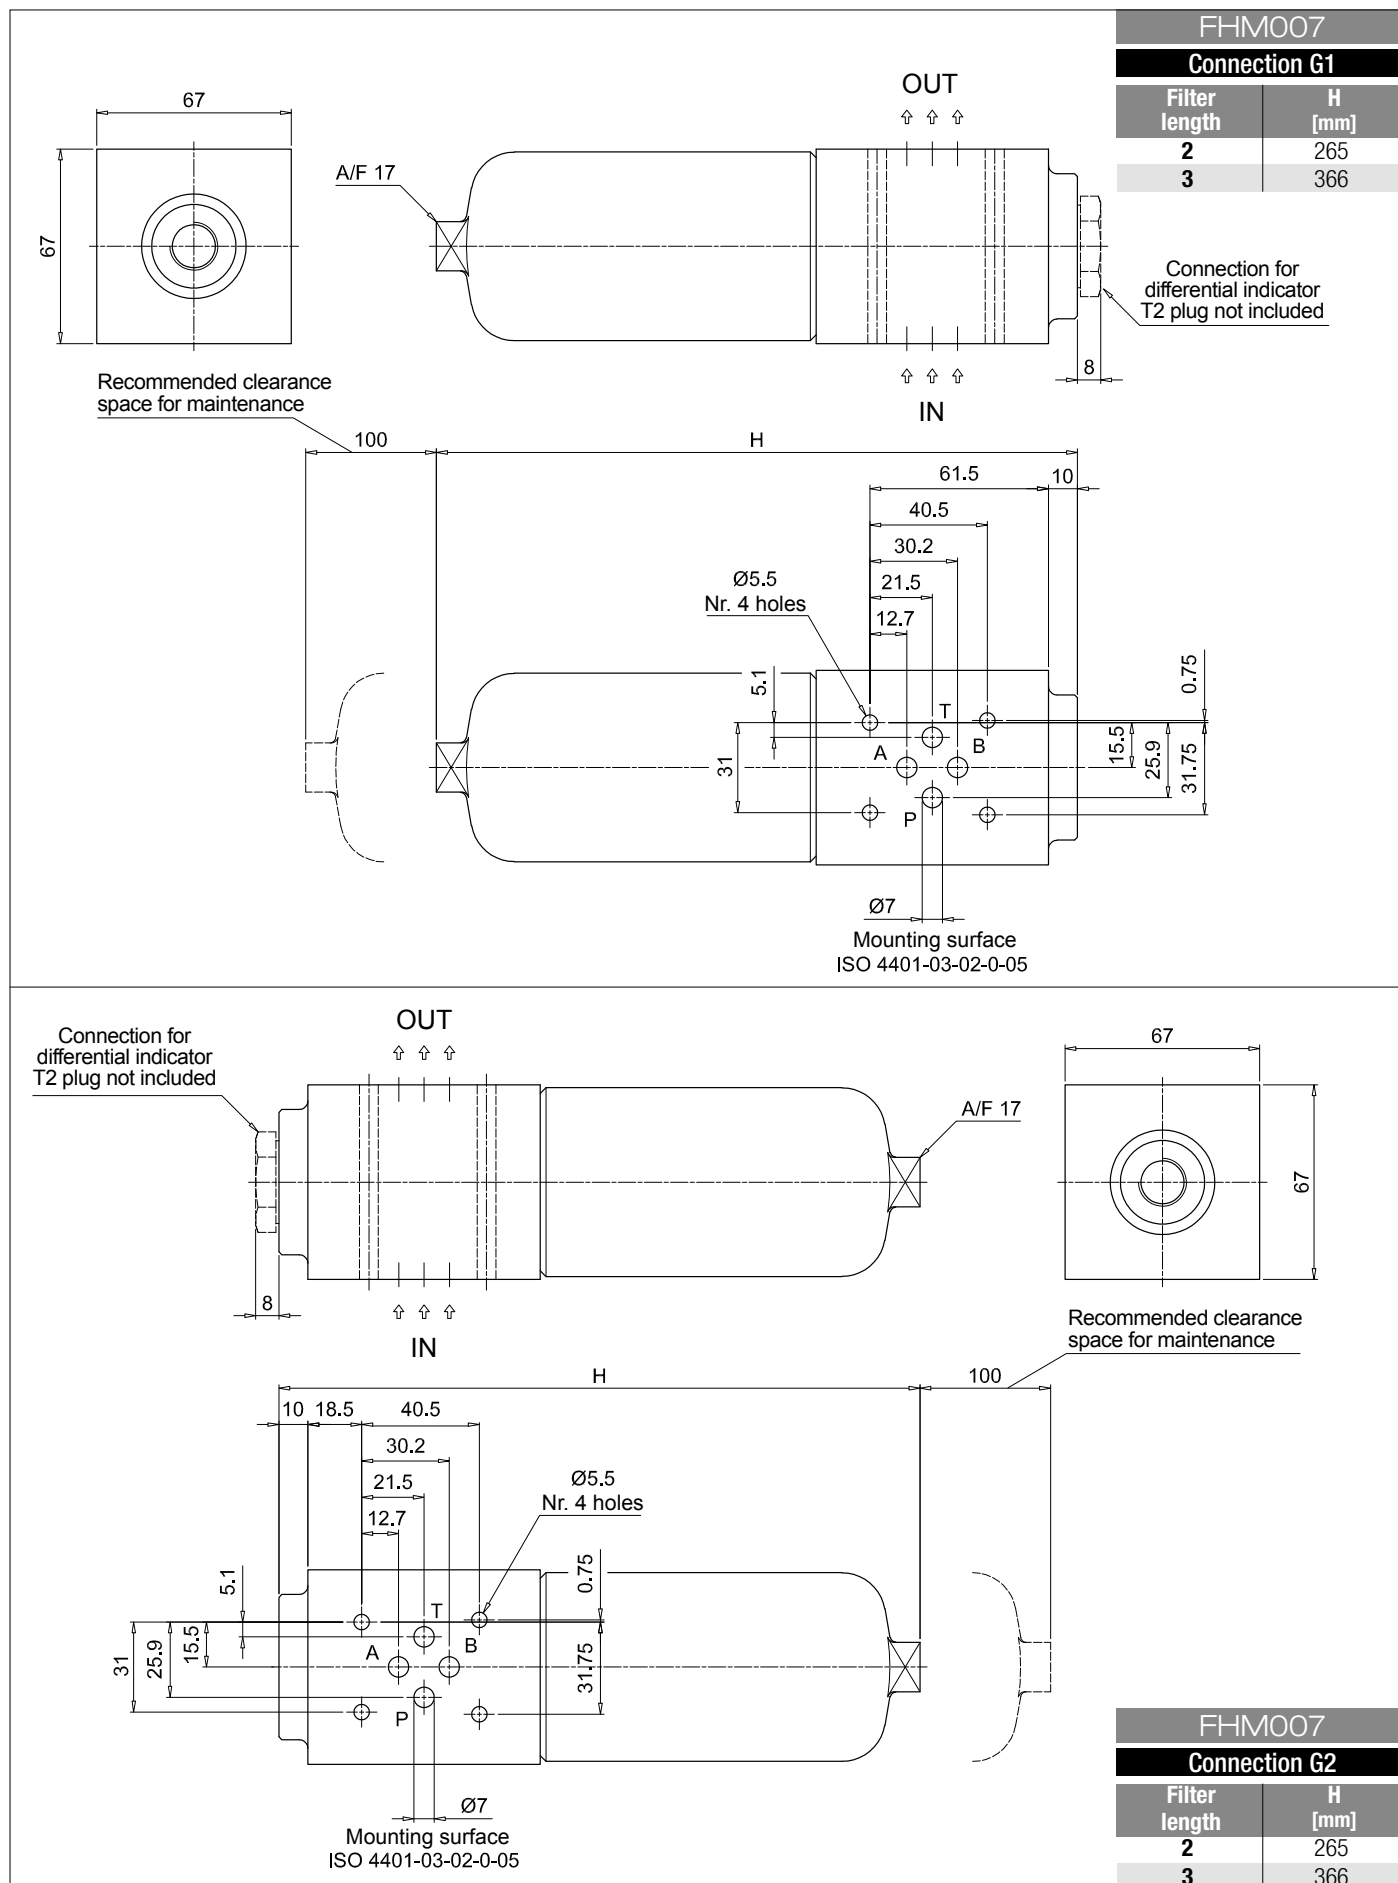



FHM FHM050 - FHM065 - FHM135

Designation & Ordering code

COMPLETE FILTER

Series and size				Configuration example: FHM135 3 S A F1 A10 H P01											
FHM050 FHM065 FHM135															
Length	FHM050	FHM065	FHM135												
1	•	•	•												
2	•	•	•												
3	•	•	•												
4	•														
5	•														
Valves															
S	Without bypass														
B	With bypass 6 bar														
T	With check valve, without bypass														
D	With check valve, with bypass 6 bar														
Seals															
A	NBR														
V	FPM														
Connections															
F1	Manifold														
Filtration rating (filter media)															
A03	Inorganic microfiber	3 µm	A16	Inorganic microfiber	16 µm										
A06	Inorganic microfiber	6 µm	A25	Inorganic microfiber	25 µm										
A10	Inorganic microfiber	10 µm	M25	Wire mesh	25 µm										
Valves:						FHM050				FHM065-135				Execution	
Element	Δp	S	B	T	D	S	B	T	D						
N	20 bar		•		•		•		•	P01	MP Filtri standard				
H	210 bar						•		•	Pxx	Customized				
S	210 bar	•			•										

FILTER ELEMENT


Element series and size				Configuration example: HP135 3 A10 A H P01						
HP050 HP065 HP135										
Element length	HP050	HP065	HP135							
1	•	•	•							
2	•	•	•							
3	•	•	•							
4	•									
5	•									
Filtration rating (filter media)										
A03	Inorganic microfiber	3 µm	A16	Inorganic microfiber	16 µm					
A06	Inorganic microfiber	6 µm	A25	Inorganic microfiber	25 µm					
A10	Inorganic microfiber	10 µm	M25	Wire mesh	25 µm					
Seals		Element Δp	HP050	HP065	HP135	Execution				
A	NBR	N	20 bar	•	•	P01	MP Filtri standard			
V	FPM	H	210 bar		•	Pxx	Customized			
		S	210 bar	•						

ACCESSORIES

Differential indicators		page			page
DEA	Electrical differential indicator	563	DLE	Electrical / visual differential indicator	566
DEH	Hazardous area electronic differential indicator	563-564	DTA	Electronic differential indicator	567
DEM	Electrical differential indicator	564-565	DVA	Visual differential indicator	567
DLA	Electrical / visual differential indicator	565-566	DVM	Visual differential indicator	567
Additional features		page			
T2	Plug	568			


FHM050	
Filter length	H [mm]
1	154
2	191
3	233
4	281
5	403

FHM065	
Filter length	H [mm]
1	162
2	193
3	295

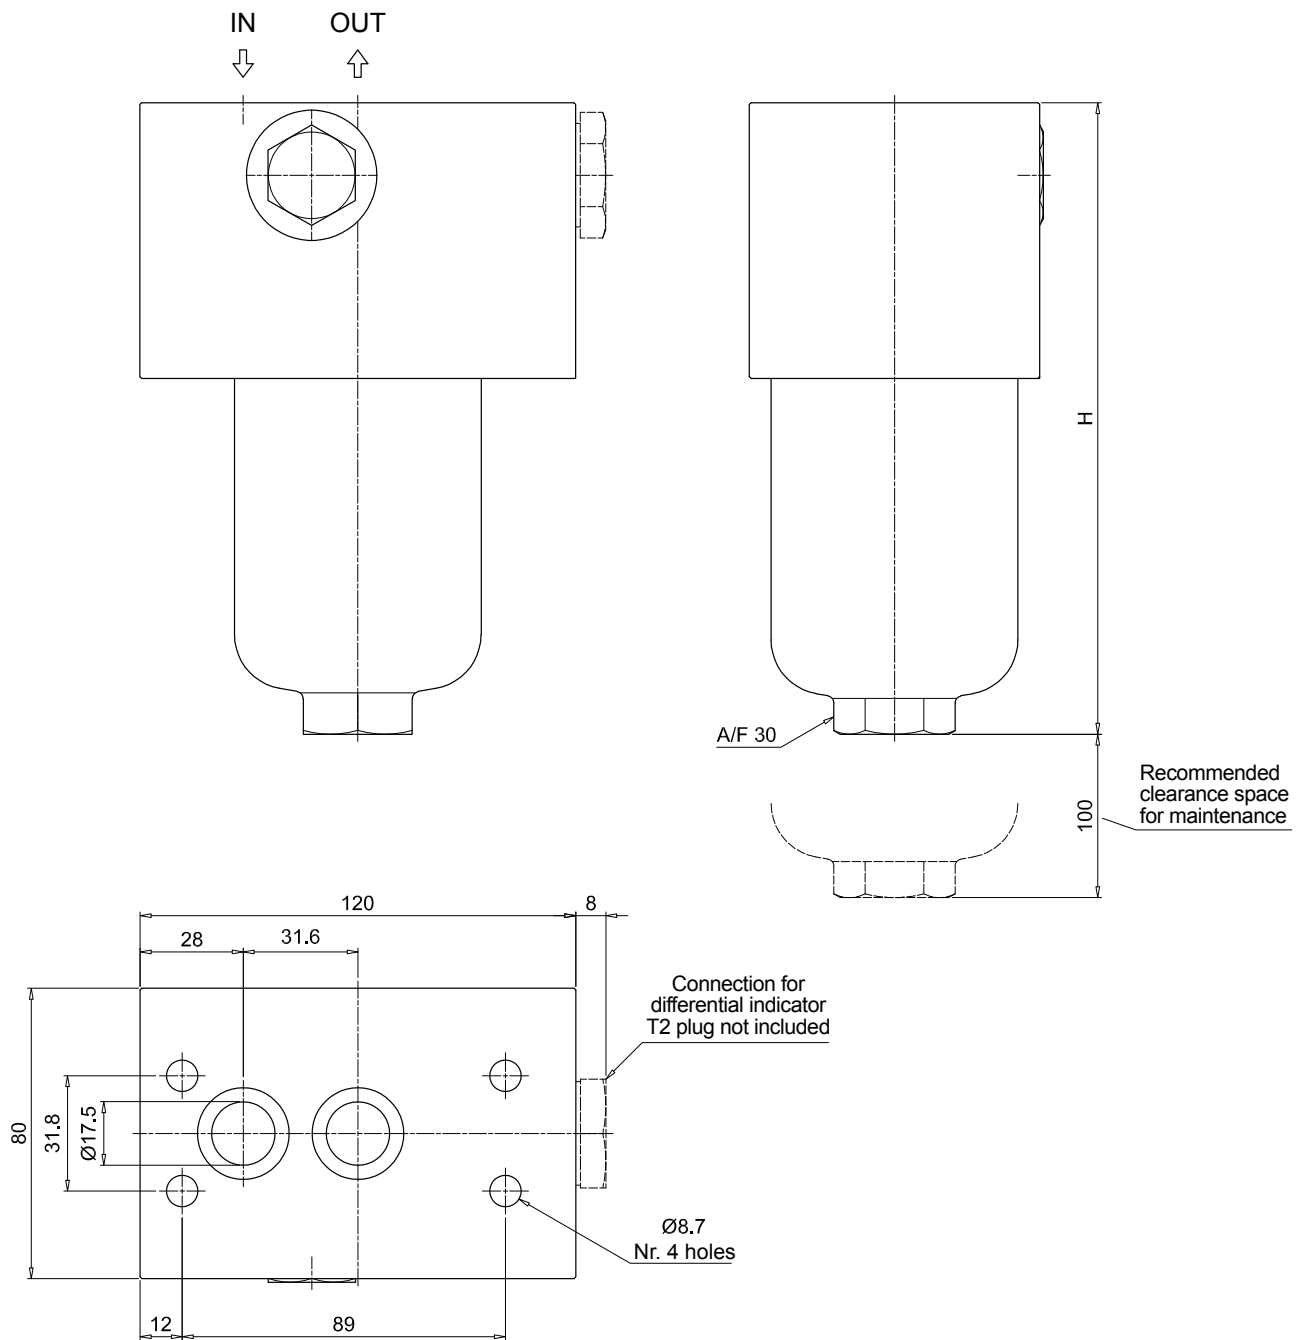

FHM FHM050 - FHM065 - FHM135

Dimensions

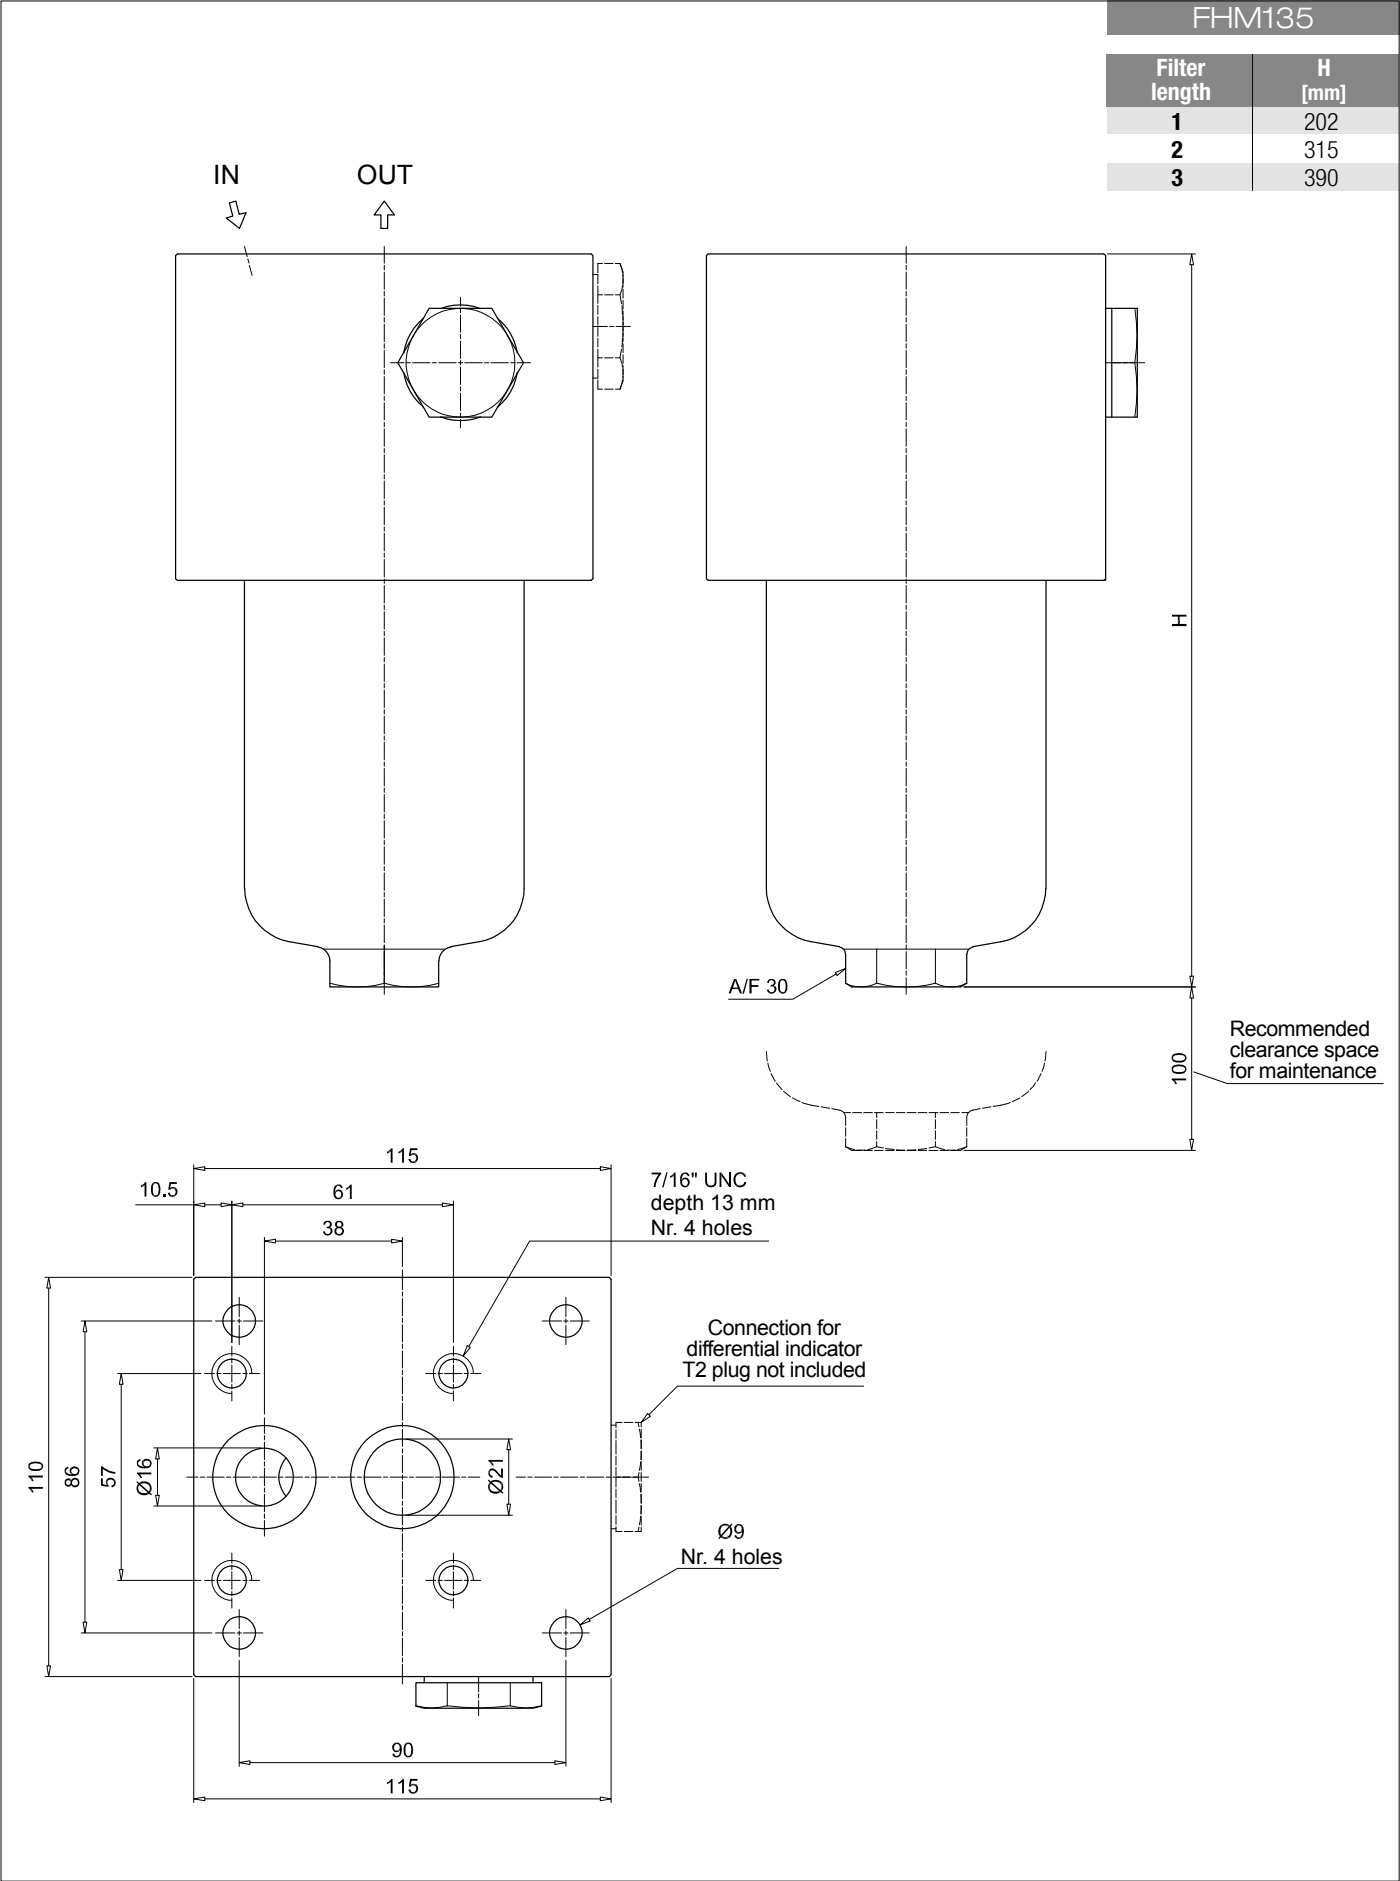

FHM FHM320 - FHM500

Designation & Ordering code

COMPLETE FILTER

Series and size			Configuration example: FHM320 4 D A F1 A06 N P01											
FHM320 FHM500														
Length	FHM320	FHM500												
1	•	•												
2	•	•												
3	•	•												
4	•	•												
5		•												
Valves														
S	Without bypass													
B	With bypass 6 bar													
T	With check valve, without bypass													
D	With check valve, with bypass 6 bar													
Seals														
A	NBR													
V	FPM													
Connections														
F1	Manifold													
Filtration rating (filter media)														
A03	Inorganic microfiber	3 µm	A16	Inorganic microfiber	16 µm									
A06	Inorganic microfiber	6 µm	A25	Inorganic microfiber	25 µm									
A10	Inorganic microfiber	10 µm	M25	Wire mesh	25 µm									
</														

FILTER ELEMENT

Element series and size			Configuration example: HP320 4 A06 A N P01				
HP320 HP500							
Element length	HP320	HP500					
1	•	•					
2	•	•					
3	•	•					
4	•	•					
5		•					
Filtration rating (filter media)							
A03	Inorganic microfiber 3 μm	A16	Inorganic microfiber	16 μm			
A06	Inorganic microfiber 6 μm	A25	Inorganic microfiber	25 μm			
A10	Inorganic microfiber 10 μm	M25	Wire mesh	25 μm			


Seals	Element Δp	HP320	HP500	Execution
A NBR	N 20 bar	•	•	P01 MP Filtri standard
V FPM	H 210 bar	•		Pxx Customized
	S 210 bar		•	

ACCESSORIES


Differential indicators		page			page
DEA	Electrical differential indicator	563	DLE	Electrical / visual differential indicator	566
DEH	Hazardous area electronic differential indicator	563-564	DTA	Electronic differential indicator	567
DEM	Electrical differential indicator	564-565	DVA	Visual differential indicator	567
DLA	Electrical / visual differential indicator	565-566	DVM	Visual differential indicator	567
Additional features		page			
T2	Plug	568			

FHM320



Filter length	H [mm]	H2 [mm]	
		Execution P01	Execution P02
1	293	150	-
2	416	150	-
3	548	150	-
4	702	150	550

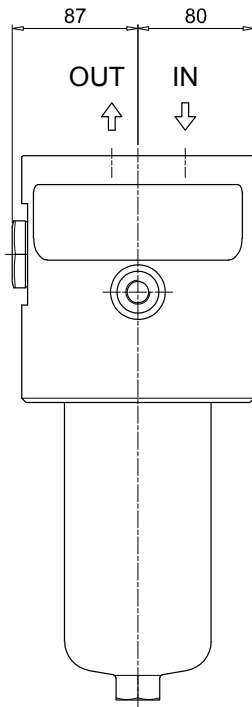


Length 1 - 2 - 3

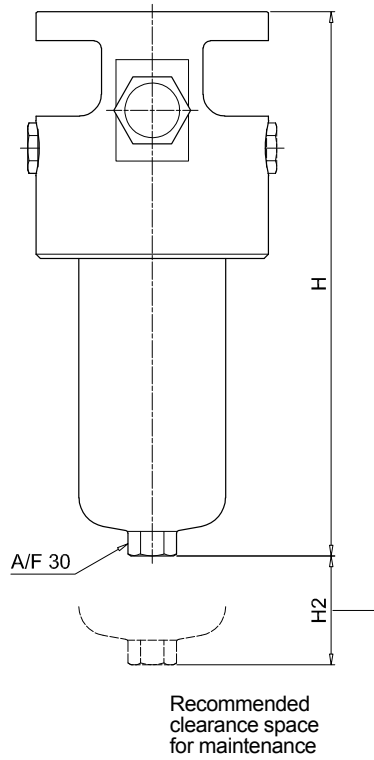


Length 4

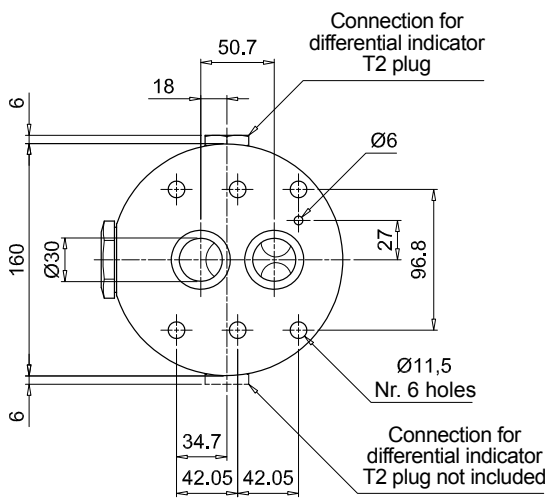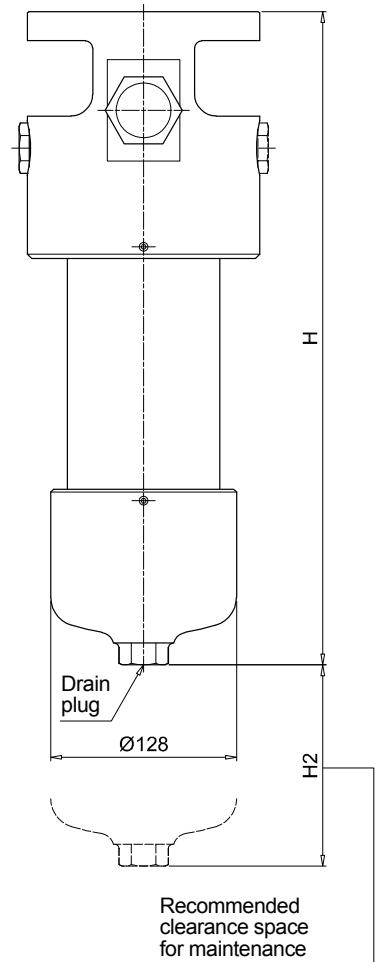



FHM500			
Filter length	H [mm]	H2 [mm]	
		Execution P01	Execution P02
1	355	150	-
2	445	150	-
3	521	150	-
4	679	150	480
5	845	150	650

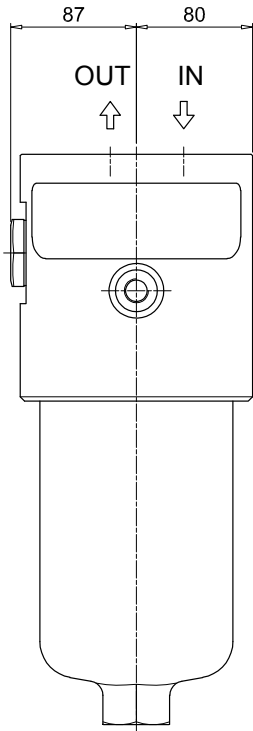


Length 1 - 2 - 3

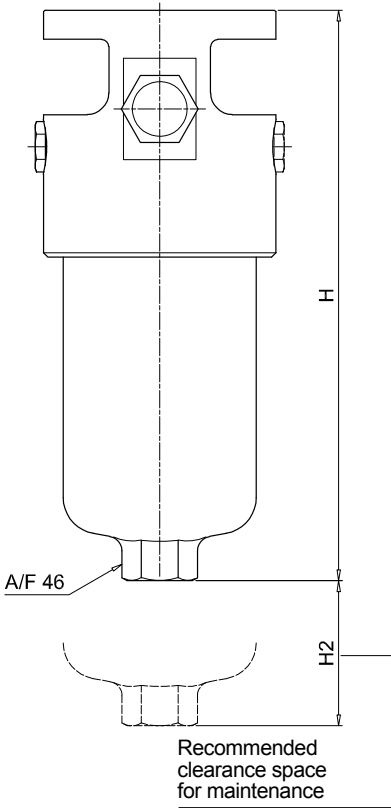

Length 4 - 5

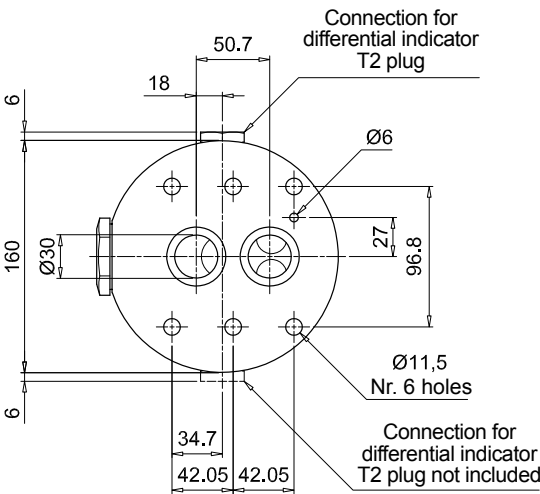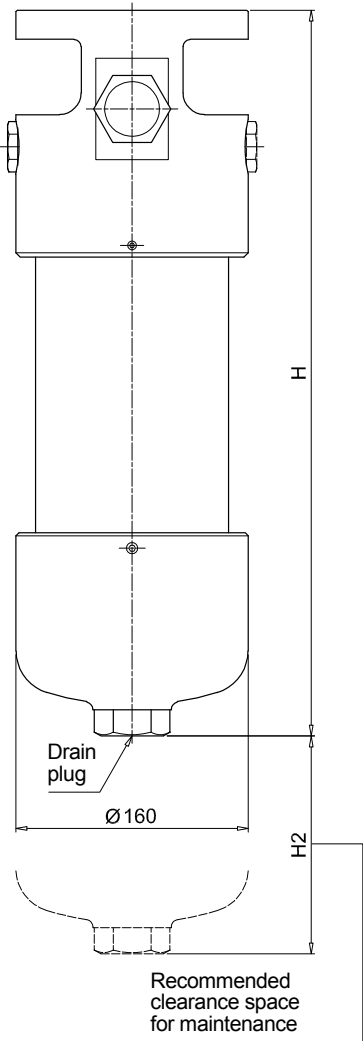


FHM 006 - 007 - 010

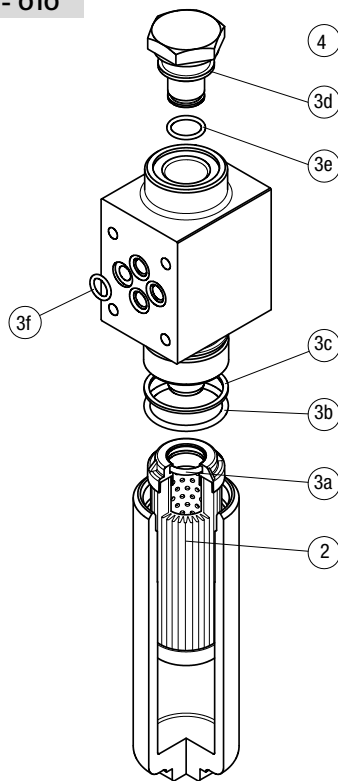

Item:	Q.ty: 1 pc. 2	Q.ty: 1 pc. 3 (3a ÷ 3f)		Q.ty: 1 pc. 4	
Filter series	Filter element	Seal Kit code number NBR FPM		Indicator connection plug NBR	FPM
FHM 006	See order table	02050324	02050325	T2H	T2V
FHM 007		02050600	02050601		
FHM 010		02050320	02050321		

FHM 050 - 065 - 135 - 320 - 500

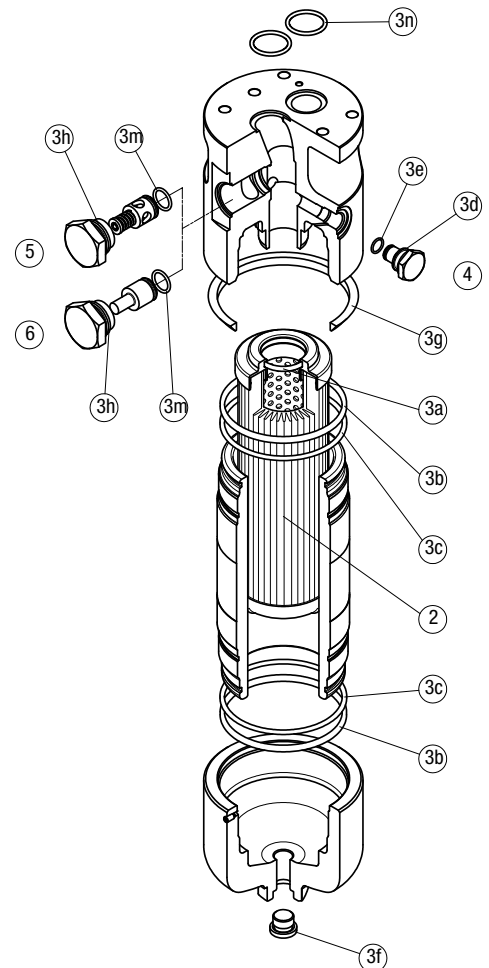

Q.ty: 1 pc. 2		Q.ty: 1 pc. 3 (3a ÷ 3m)		Q.ty: 1 pc. 4		Q.ty: 1 pc. 5		Q.ty: 1 pc. 6	
Filter series	Filter element	Seal Kit code number NBR FPM		Indicator connection plug NBR FPM		Bypass assembly NBR FPM		Non-bypass assembly NBR FPM	
FHM 050	See order table	02050410	02050411	T2H	T2V	02001400	02001401	02001402	02001403
FHM 065		02050268	02050279			02001400	02001401	02001402	02001403
FHM 135		02050271	02050282			02001404	02001405	02001406	02001407
FHM 320		02050275	02050286			02001408	02001409	02001410	02001411
FHM 500		02050332	02050333			02001408	02001409	02001410	02001411