





Cross pilot with common port 4s

**CAVITY: T-23A** 



snhy.com/XMX



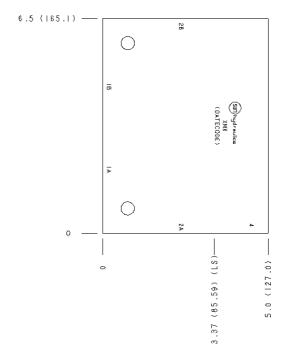

### **TECHNICAL DATA**

| Body Type              | Line mount                      |  |
|------------------------|---------------------------------|--|
| Interface              | None                            |  |
| Body Features          | Cross pilot with common port 4s |  |
| Mounting Hole Diameter | 10,4 mm                         |  |
| Mounting Hole Depth    | Through                         |  |
| Mounting Hole Quantity | 2                               |  |
| Open Cavities          | 2                               |  |
| Cavity                 | T-23A                           |  |
|                        | 1" BSPP                         |  |
| Model Weight           | 2.78 kg.                        |  |

## **NOTES**

*Important:* Carefully consider the maximum system pressure. The pressure rating of the manifold is dependent on the manifold material, with the port type/size a secondary consideration. Manifolds constructed of aluminum are not rated for pressures higher than 3000 psi (210 bar), regardless of the port type/size specified.

# **PORT DESIGNATORS**

| Modifiers | Ports   |
|-----------|---|
| XMX       | Ports 1A, 1B, 2A, 2B: 1" BSPP; Port 4: 1/4" BSPP; |

# **CONFIGURATION OPTIONS Model Code Example: XMX**

MODIFIER

6061-T651 Aluminum, Buna-N

/S 65-45-12 Ductile Iron, Buna-N, Blackened

### **MANIFOLD FACES**

#### **FACE GRID**

| 1 | 2  | 3  | 4  |
|---|----|----|----|
| 5 | 6  | 7  | 8  |
| 9 | 10 | 11 | 12 |

