
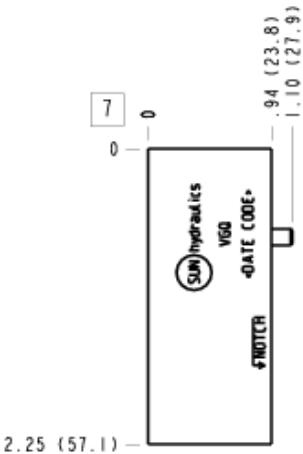


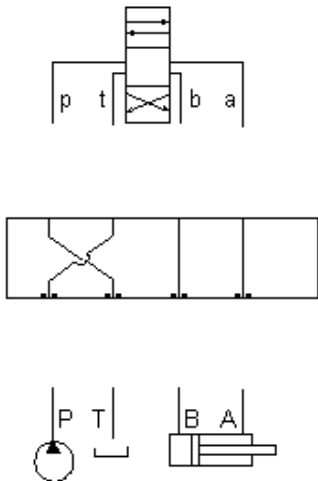

TECHNICAL DATA

Body Type	Sandwich
Interface	ISO 03
Body Features	Adaptor - Switches ports P and T
Stack Height	25 mm
Seal Plate Included (see notes)	Yes

NOTES

- Stack height value in technical data table includes seal retainer plate.
- Important:** Carefully consider the maximum system pressure. The pressure rating of the manifold is dependent on the manifold material, with the port type/size a secondary consideration. Manifolds constructed of aluminum are not rated for pressures higher than 3000 psi (210 bar), regardless of the port type/size specified.

INCLUDED COMPONENTS

Part	Description	Quantity
500-001-012	O-Ring	4
700-002	Seal Plate	1
811-001-006	Pin	1

CONFIGURATION OPTIONS

Model Code Example: VGQ

MODIFIER

- 6061-T651 Aluminum, Buna-N**
- /11 6061-T651 Aluminum, Buna-N, Clear Anodize - Per MIL SPEC 8625F Type II, Class I
 - /10 6061-T651 Aluminum, Buna-N, Black Anodize - Per MIL SPEC 8625F Type II, Class II
 - /V 6061-T651 Aluminum, Viton
 - /16 6061-T651 Aluminum, Viton, Clear Anodize - Per MIL SPEC 8625F Type II, Class I
 - /15 6061-T651 Aluminum, Viton, Black Anodize - Per MIL SPEC 8625F Type II, Class II
 - /S 65-45-12 Ductile Iron, Buna-N, Chem. Black
 - /S3 65-45-12 Ductile Iron, Buna-N, Trivalent Clear Zinc with Top Sealer
 - /Y 65-45-12 Ductile Iron, Viton, Chem. Black
 - /Y3 65-45-12 Ductile Iron, Viton, Trivalent Clear Zinc with Top Sealer